
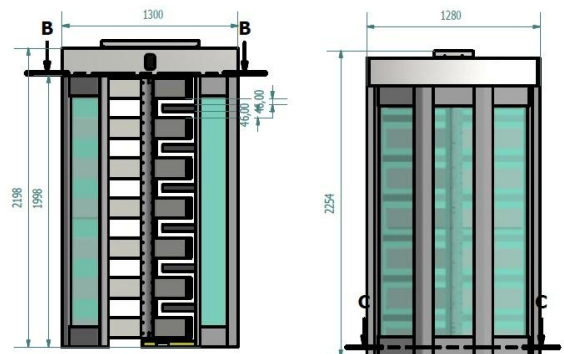


T 2500 K_CRYSTAL SINGLE 3 ARMED

Control /Operation Voltage	:24VDC +-%20
Power Consumption	:30W
Passing Block	:With controlled turning tripod arms positioned with 120 degrees
Tripod Locking	:With 24 V DC selenoids; locks when the selenoids are pulled. (In Emergency, system is shut down and turnstiles provide free passing in both directions.)
Passing Direction Control	:Free bi-directional entry-exit control
Tripod Position Dedection	:Direction of the tripod position with two microswitches.
Motion Control	:When the cycle starts to one direction, the reverse is blocked and after a half turn the rest of the cycle is completed, automatically and smoothly by a hydraulic shock absorber.
Installation	:Simple & easy installation with a special pedestal.
Operation Temperature	:- 20° C - + 70° C
Indicators	:One light indicator on both directions
Dimensions	: 1280x1300x2254 mm
Weight	: 300-350 kg
Optional Accesories	: Remote control, button unit, 3 armed.

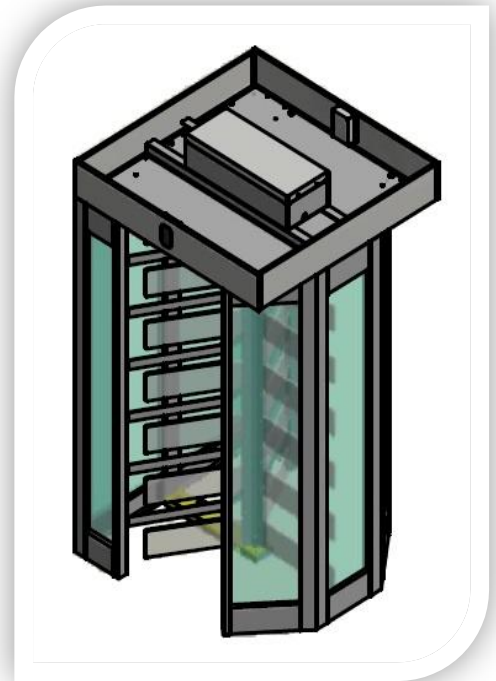

- 304 Stainless Steel, Powder Coated Options
- Easy to Use, Bi-directional Control
- Strong Ergonomic Design
- % 100 Turkish, Production Continuity
- Certified Quality
- Continuous Service and Spare Parts Support