

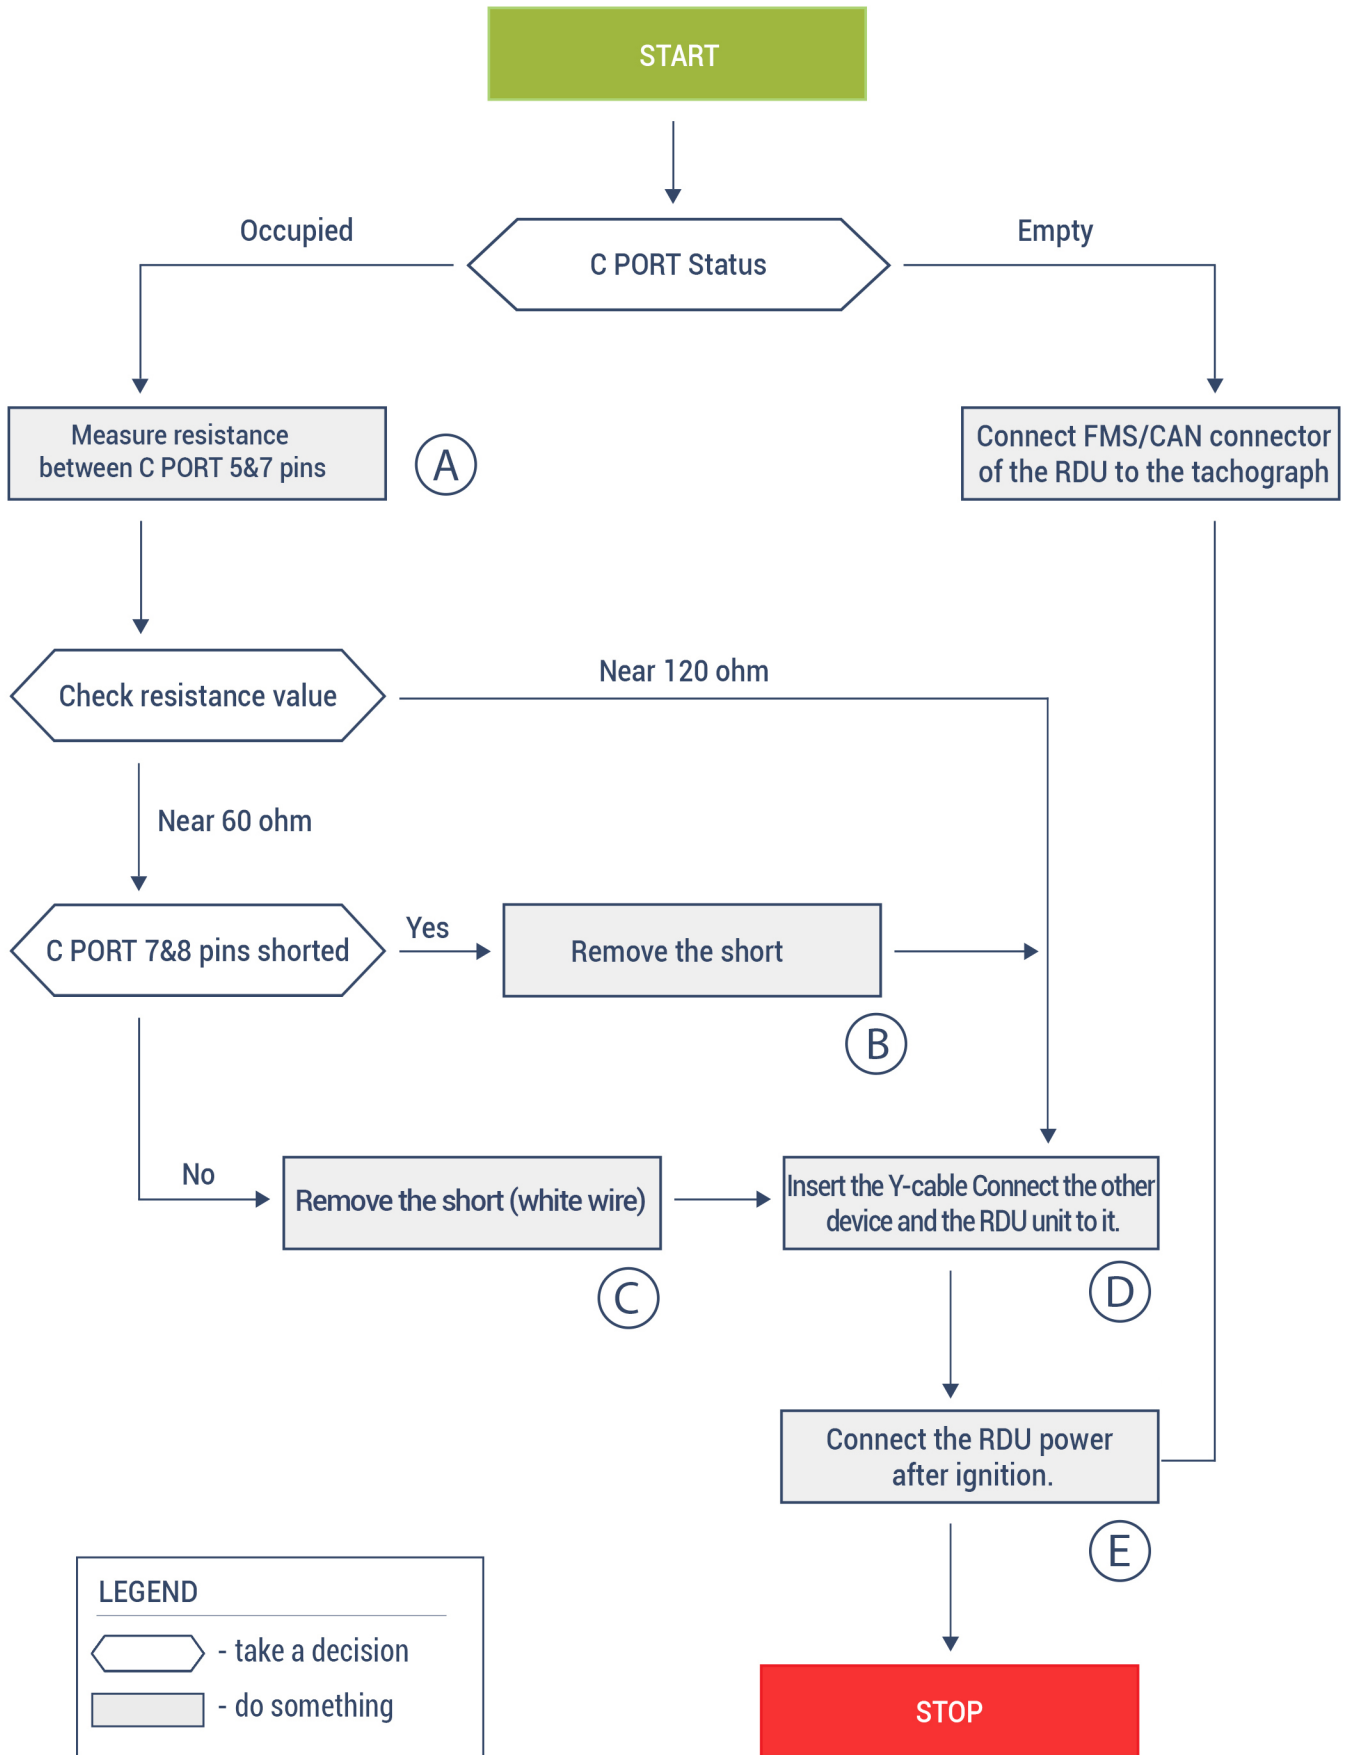
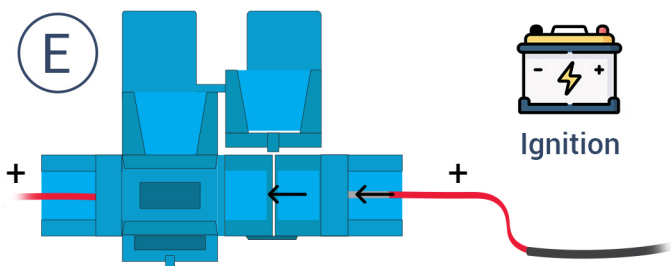
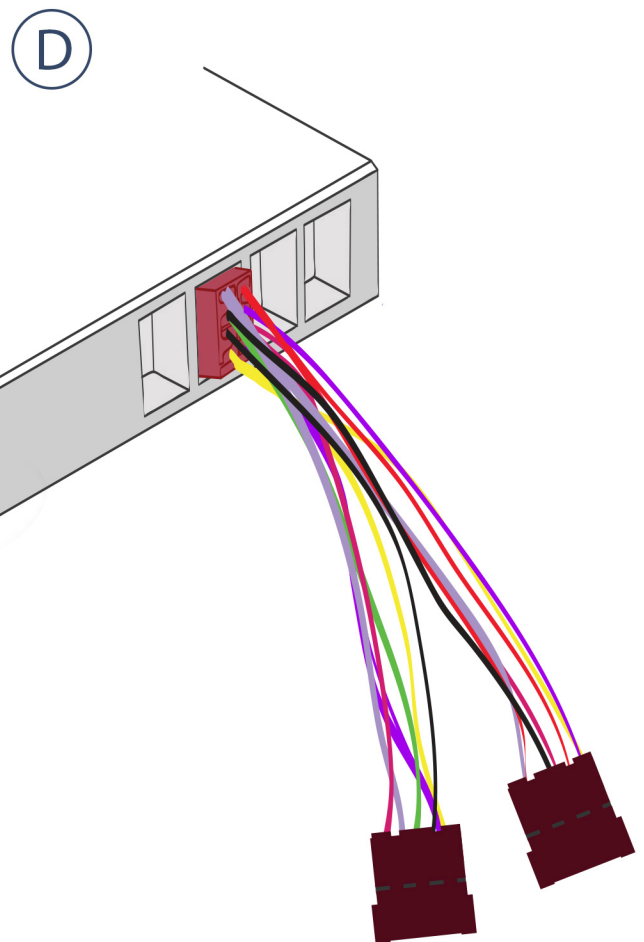
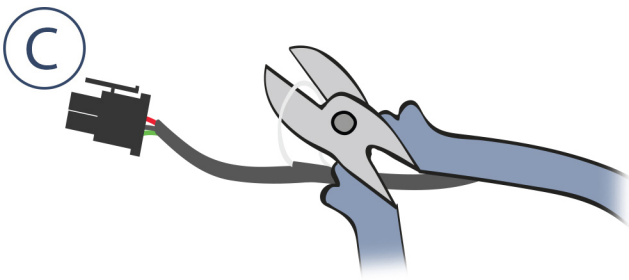


RDU 4G Connection scenarios

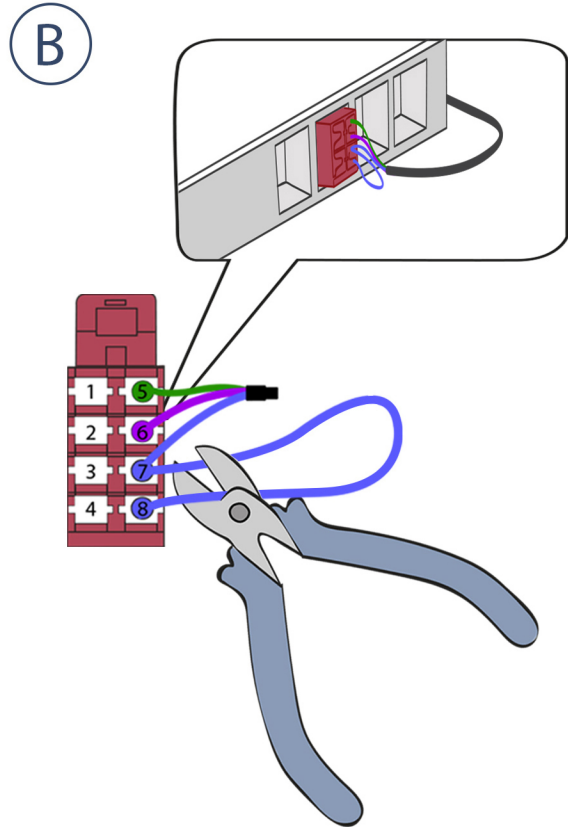


After the RDU is installed measure the CAN resistance between the CAN high (C5) and CAN low (C7) should be around 60 ohm.

RDU 4G Connection scenarios

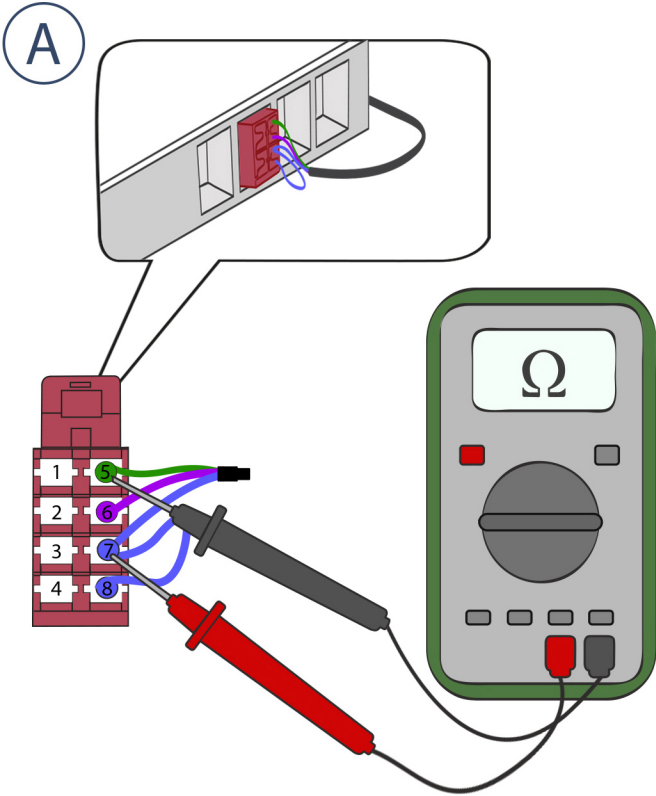

Open fuse holder and insert ignition wire.

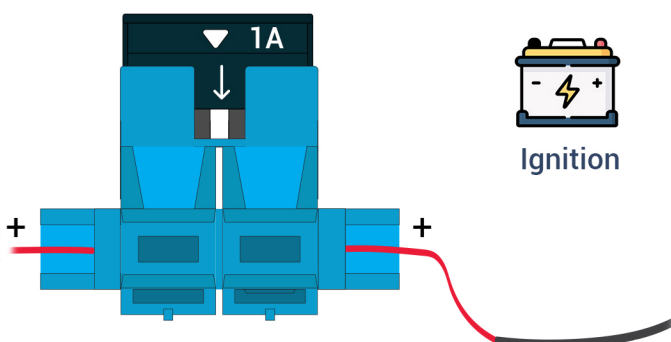

Insert the 1A fuse after the ignition wire is mounted and the holder is closed.