Configuration of the device

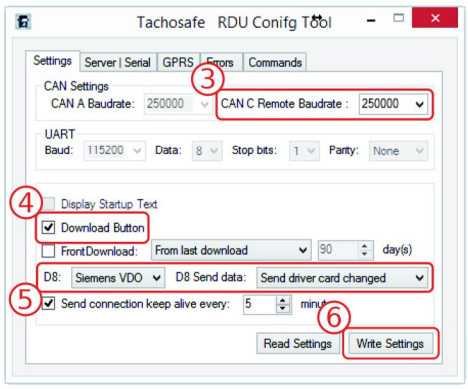

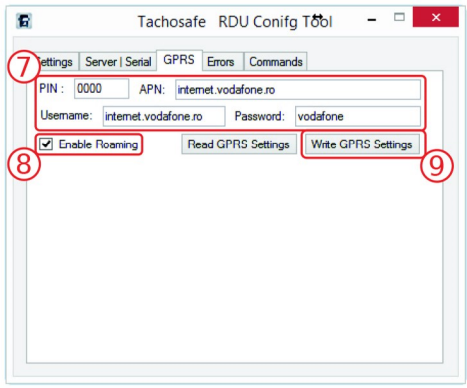

Modify the device settings according to your SIM card / Tachograph type and configurtion.

Connecting to the tachograph

Before installation make a download from the tachograph on the front download interface with another download device and send it to the truck owner company.

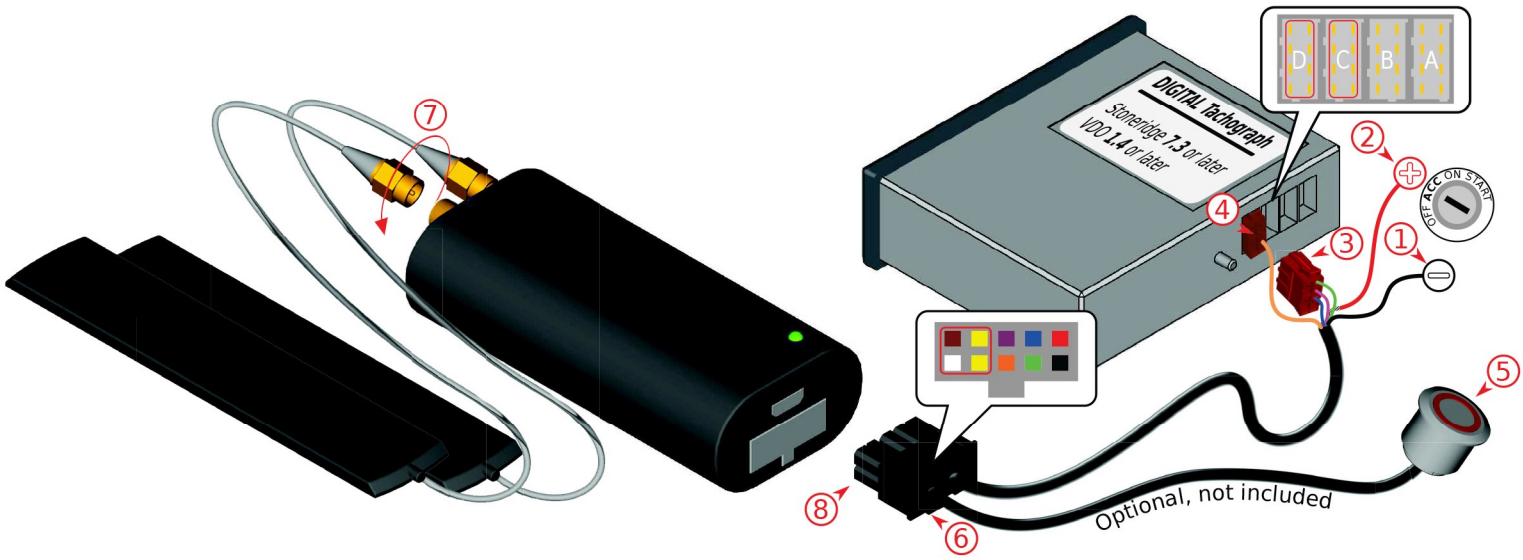

Follow the steps below for easy installation: [1] connect the negative terminal, **[2]** connect the positive terminal after ignition, **[3]** connect the CAN connector to tachograph, if the C port is occupied then please follow the connection scenario, **[4]** connect serial data to D8, **[5]** fix the push button into a 16mm hole, **[6]** insert the button wires to the data connector (observe wire position), **[7]** install the two 4G antennas, **[8]** connect the data connector to the device

Device status messages

- Continous GREEN - OK
- 1 Check SIM card
- 2 Check PIN
- 3 Reset PIN on phone
- 4 Check BT dongle
- 5 Low or no mobile signal
- 6 Replace device

- Count ORANGE blinks for troubleshooting
- 7 Check VU CAN/enable CAN-C
- 8 Check remote download on VU
- 9 Enable roaming
- 10 Check APN settings
- 11 SIM can't register on network

ON — X Blinking **x** times

Installation of TachoSafe RDU Manager

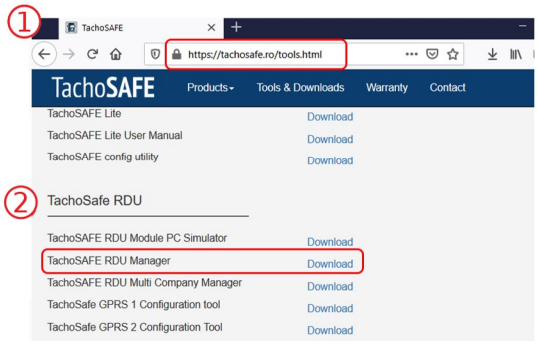



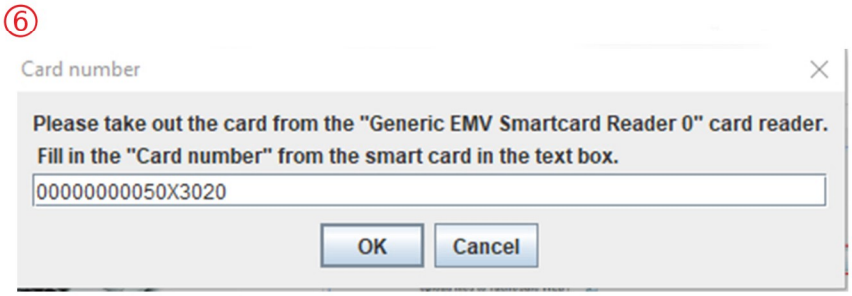

[1] [2] Download the ***TachoSafe RDU Manager*** from ***www.tacho4safe.com/download,*** **[3]** Install the downloaded application **[4]** introduce your ***username*** and ***password***, **[5]** connect a smartcard reader to your PC and insert your company card **[6]** enter the company card number and the download should start.

Checklist

Tachograph

Type: _____

Version: _____

Remote download enabled: _____

Remote download on CAN C: _____

Stoneridge 8: disable remote download card writing

RDU device

SIM inserted: _____

Proper D8 selected: _____

APN settings correct: _____

Mounted after ignition: _____

CAN C connected: _____

D8 connected: _____

Button present: _____

Installation notes

Serial number: TL_____

Vechicle Registration Number or VRI: _____

Company: _____

Installer company: _____

Installer person: _____

Date (*yy/mm/dd*): __/__/__. Signature: _____